

Sectional Extruded Saddles

Combine features of flexibility not obtainable in the one-piece type saddles. The extension members are interchangeable and carried in stock in standard widths from one inch to five inches with a one-inch variant, making it possible to extend or decrease the width of interior or exterior members to meet practically all conditions. For example, the width of Saddles 28B, 28C, 32C, and 32B may have extensions of five inches on each side of the main member.


All Aluminum Saddles furnished in Alloy 63 TS Mill Finish. All Bronze Saddles furnished in Architectural Alloy No. 385. Finished Mill, Polished Bright, or Satin.

Self-Leveling Principle


A most important feature is the Self-Leveling Principle of the pivoted extension members. This is particularly important when door and sill levels vary. Both extension members may be screwed in place or the inner extension member may be left loose and made to extend over mats, runners, or similar door coverings.

Exterior doors opening in: the extruded brass rain-drip No. 15 is recommended for use in all installations for doors opening in.

#28C

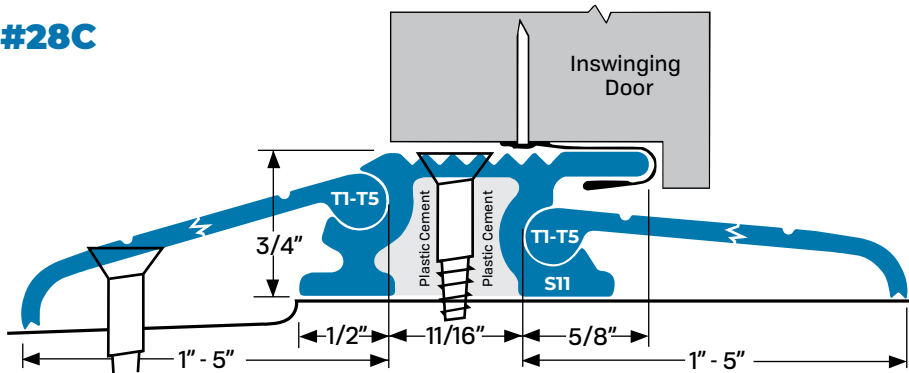

#32C

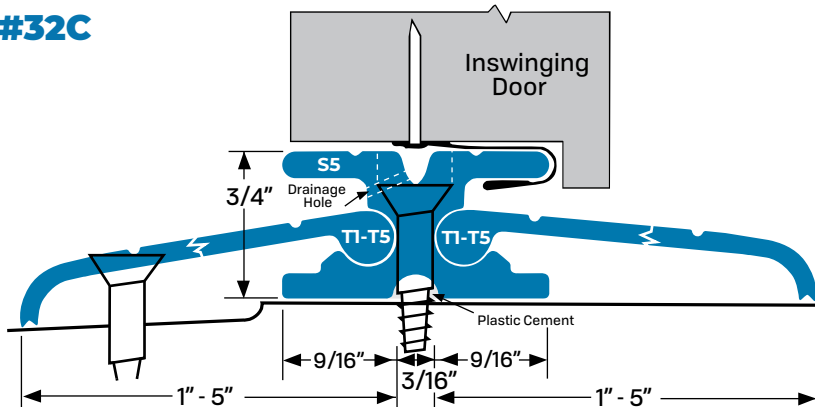

#32D

